
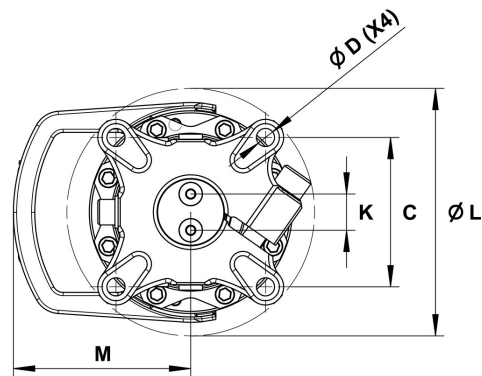
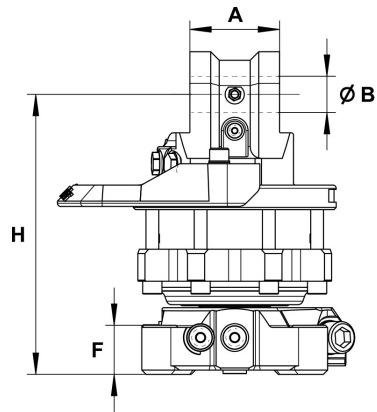


# GV 4/30 B84 K2

Part No.: 5002706

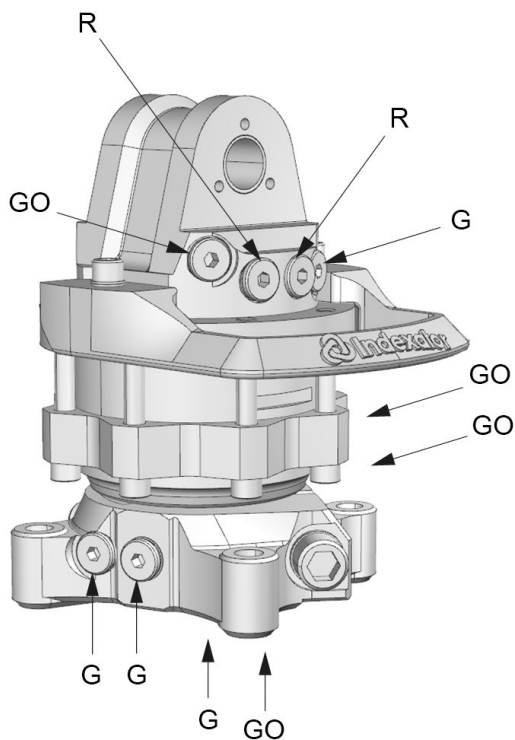

| Upper connection | Lower connection |
|------------------|------------------|
| G 3/8            | G 3/8            |

|             |              |               |              |             |              |             |               |              |
|-------------|--------------|---------------|--------------|-------------|--------------|-------------|---------------|--------------|
| A:<br>84 mm | B:<br>Ø30 mm | C:<br>140x140 | D:<br>Ø17 mm | F:<br>46 mm | H:<br>263 mm | K:<br>34 mm | L:<br>Ø232 mm | M:<br>166 mm |
|-------------|--------------|---------------|--------------|-------------|--------------|-------------|---------------|--------------|

|                                                                                              |                                                                                             |                                                                                                     |                                                                                                     |                                                                                                |                                                                                                        |                                                                                                        |                                                                                                        |                                                                                                        |
|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <br>34 kg | <br>360° | <br>Max<br>45 kN | <br>Max<br>25 kN | <br>1150 Nm | <br>Max<br>12 l/min | <br>Max<br>25 MPa | <br>Max<br>30 MPa | <br>Max<br>30 MPa |
|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|

K = 140×140 mm lower hole pattern.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact [rotator@indexator.com](mailto:rotator@indexator.com)