
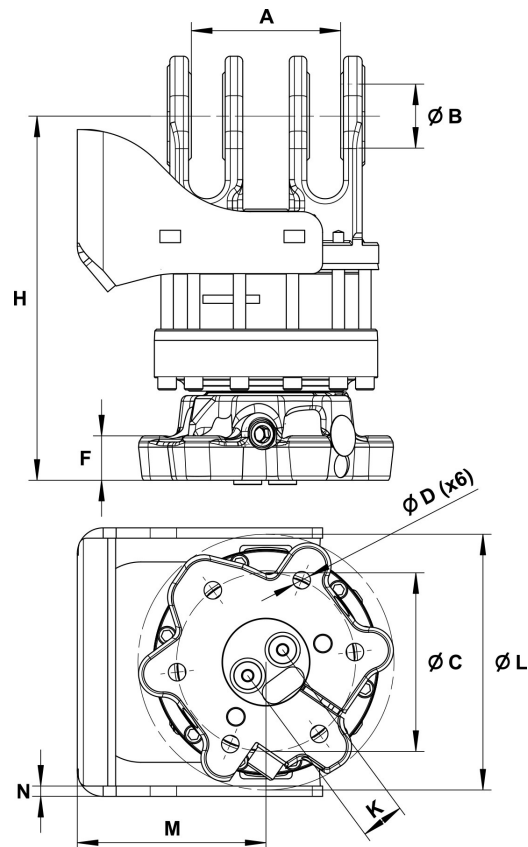


# G 171 Y HD

Part No.: 7140000

- Protected Hose Routing

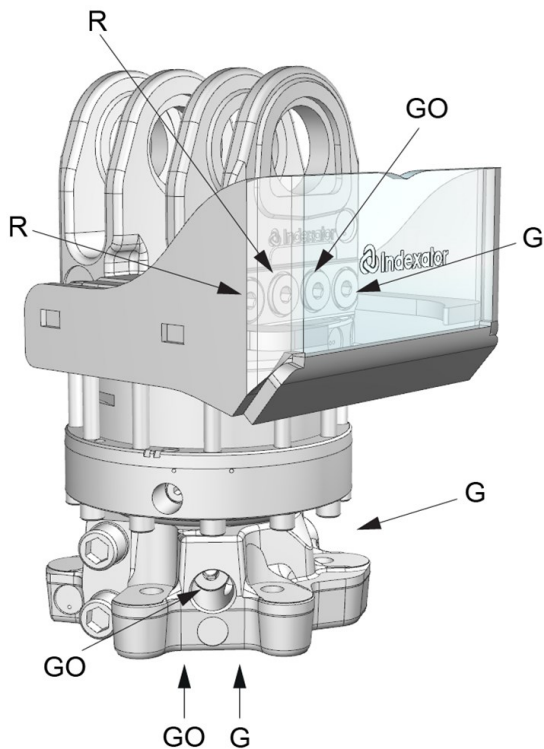

| Upper connection | Lower connection |
|------------------|------------------|
| G 1/2            | G 1/2            |

|      |     |         |        |       |        |       |         |        |       |
|------|-----|---------|--------|-------|--------|-------|---------|--------|-------|
| A:   | B:  | C:      | D:     | F:    | H:     | K:    | L:      | M:     | N:    |
| MPB1 | MPB | Ø173 mm | Ø17 mm | 40 mm | 352 mm | 42 mm | Ø248 mm | 183 mm | 10 mm |

|         |      |        |       |         |          |        |        |        |
|---------|------|--------|-------|---------|----------|--------|--------|--------|
|         |      | Max    | Max   |         | Max      | Max    | Max    | Max    |
|         |      |        |       |         |          |        |        |        |
| 65.3 kg | 360° | 160 kN | 50 kN | 3300 Nm | 35 l/min | 25 MPa | 25 MPa | 25 MPa |

Rotators with the term HD has a hose guard with extra thick material (10 mm), compared to rotators designated with Y or Y XL (6 mm).

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact [rotator@indexator.com](mailto:rotator@indexator.com)