
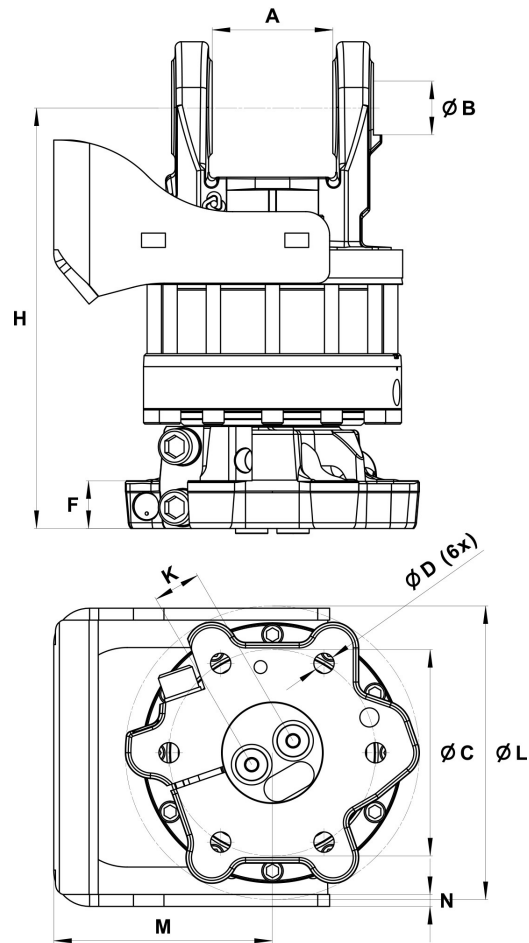


# GV 17S A Y HD

Part No.: 5217080

- Protected Hose Routing

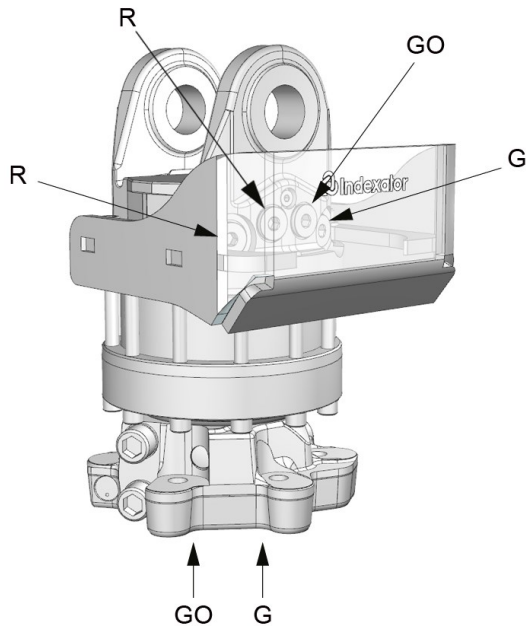

| Upper connection | Lower connection |
|------------------|------------------|
| G 1/2            | G 1/2            |

|              |              |               |              |             |              |             |               |              |             |
|--------------|--------------|---------------|--------------|-------------|--------------|-------------|---------------|--------------|-------------|
| A:<br>101 mm | B:<br>Ø45 mm | C:<br>Ø173 mm | D:<br>Ø17 mm | F:<br>40 mm | H:<br>353 mm | K:<br>40 mm | L:<br>Ø248 mm | M:<br>179 mm | N:<br>10 mm |
|--------------|--------------|---------------|--------------|-------------|--------------|-------------|---------------|--------------|-------------|

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |  |  |
| 68 kg                                                                               | 360°                                                                                | Max<br>160 kN                                                                       | Max<br>50 kN                                                                        | 3300 Nm                                                                             | Max<br>35 l/min                                                                      | Max<br>25 MPa                                                                         | Max<br>25 MPa                                                                         | Max<br>25 MPa                                                                         |

Rotator with only axial connections for a grapple function.

Rotators with the term HD has a hose guard with extra thick material (10 mm), compared to rotators designated with Y or Y XL (6 mm).

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact [rotator@indexator.com](mailto:rotator@indexator.com)