
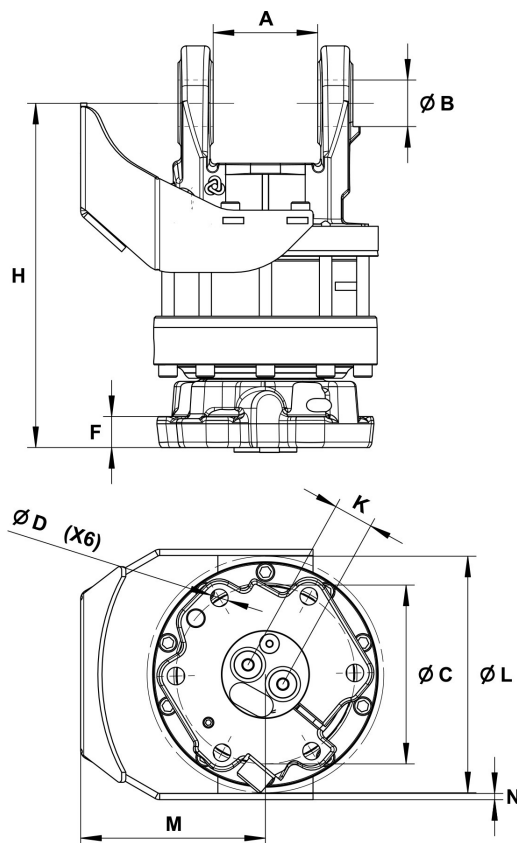


GV 12S A C Y XL

Part No.: 5212284

- Central lubrication
- Protected Hose Routing

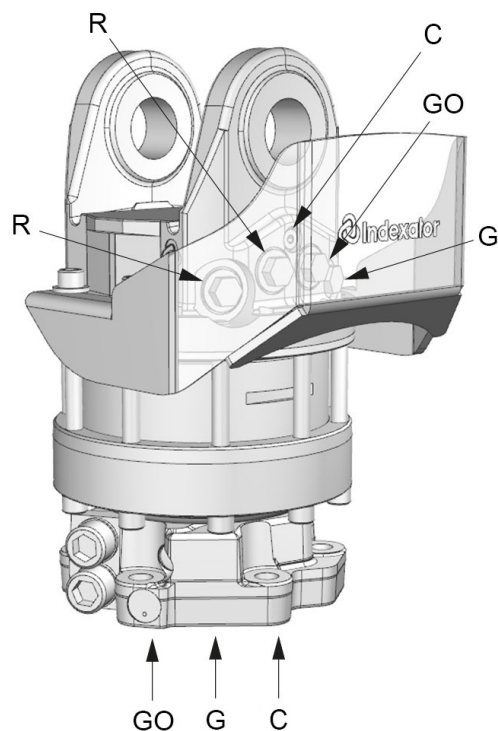

Upper connection	Lower connection	Upper	Lower
G 1/2	G 1/2	Centralsmörjning: G 1/8	Centralsmörjning: G 1/4

A: 101 mm	B: Ø45 mm	C: Ø173 mm	D: Ø17 mm	F: 30 mm	H: 333 mm	K: 38,5 mm	L: Ø229 mm	M: 179 mm	N: 6 mm
--------------	--------------	---------------	--------------	-------------	--------------	---------------	---------------	--------------	------------

58.4 kg	360°	Max 100 kN	Max 50 kN	2200 Nm	Max 25 l/min	Max 25 MPa	Max 25 MPa	Max 25 MPa
---------	------	---------------	--------------	---------	-----------------	---------------	---------------	---------------

Rotator with only axial connections for a grapple function.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com