
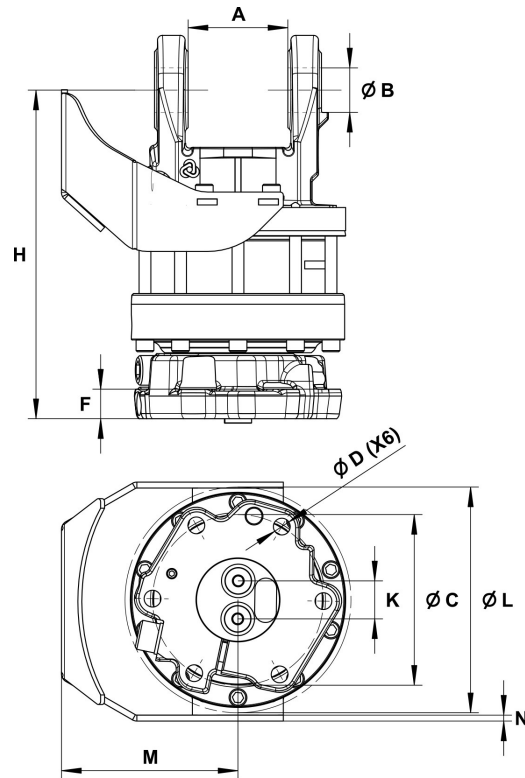


GV 12S A Y XL

Part No.: 5212283

- Protected Hose Routing

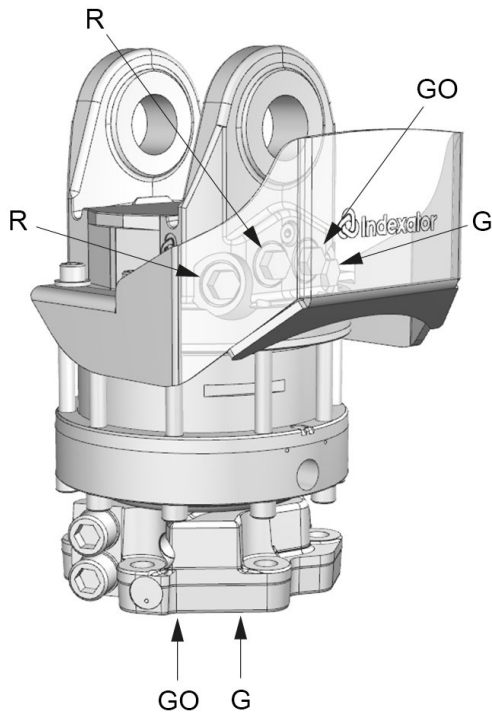

Upper connection	Lower connection
G 1/2	G 1/2

A: 101 mm	B: Ø45 mm	C: Ø173 mm	D: Ø17 mm	F: 30 mm	H: 333 mm	K: 38,5 mm	L: Ø229 mm	M: 179 mm	N: 6 mm
--------------	--------------	---------------	--------------	-------------	--------------	---------------	---------------	--------------	------------

58.5 kg	360°	Max	Max	2200 Nm	25 l/min	25 MPa	25 MPa	25 MPa
---------	------	-----	-----	---------	----------	--------	--------	--------

Rotator with only axial connections for a grapple function.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com