
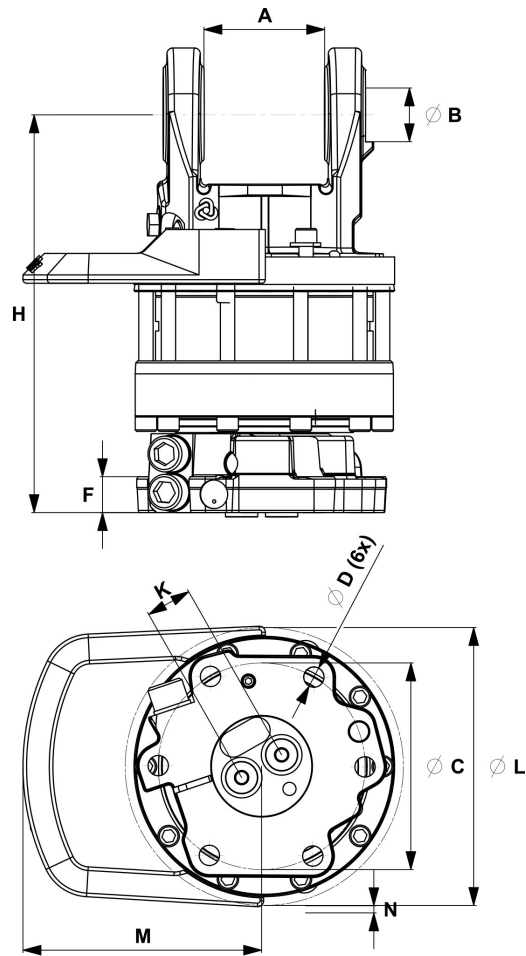


GV 12S A C LS

Part No.: 5212281

- Central lubrication
- Load Sense¹

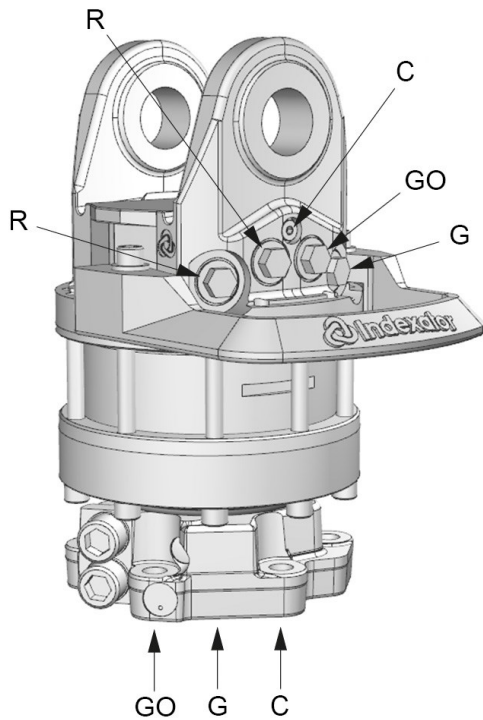

Upper connection	Lower connection	Upper	Lower
G 1/2	G 1/2	Centralsmörjning: G 1/8	Centralsmörjning: G 1/4

A:	B:	C:	D:	F:	H:	K:	L:	M:
101 mm	Ø45 mm	Ø173 mm	Ø17 mm	30 mm	333 mm	38,5 mm	Ø229 mm	202 mm

		Max	Max		Max	Max	Max	Max
58.1 kg	360°	100 kN	50 kN	2200 Nm	25 l/min	25 MPa	25 MPa	25 MPa

¹ A rotator with the shortening LS is not equipped with restrictors (unlike our standard rotators). This means that the oil flow from the base machine has to be adapted.

Rotator with only axial connections for a grapple function.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com