
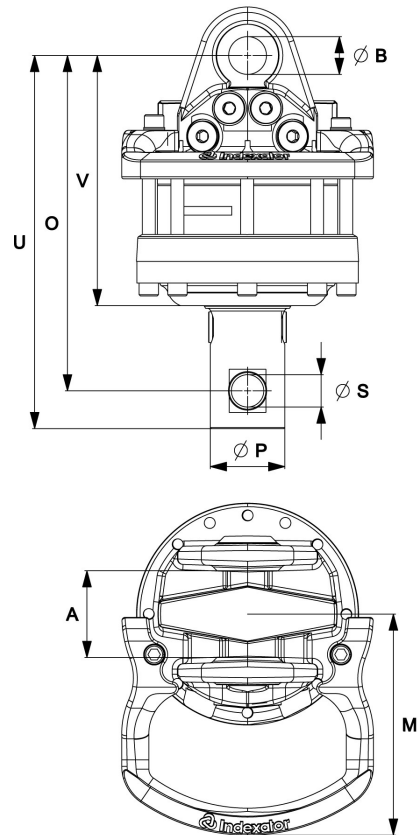


# GV 6 -69/30

Part No.: 5006295

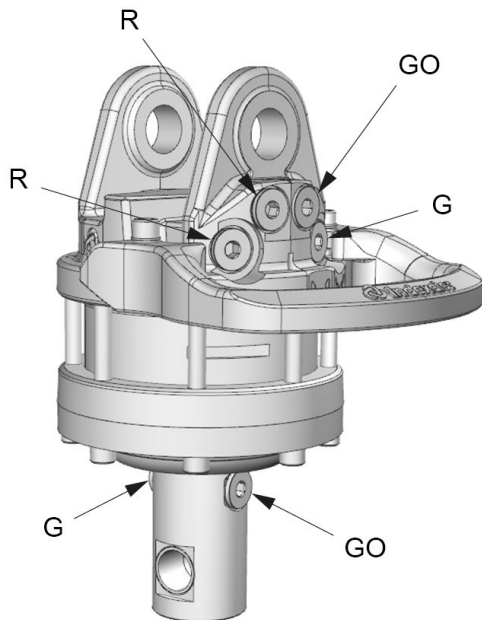

| Upper connection | Lower connection |
|------------------|------------------|
| G 1/2            | G 1/2            |

|               |              |              |              |              |              |              |              |
|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| A:<br>80,5 mm | B:<br>Ø35 mm | M:<br>205 mm | O:<br>311 mm | P:<br>Ø69 mm | S:<br>Ø30 mm | U:<br>346 mm | V:<br>232 mm |
|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|

|                                                                                              |                                                                                             |                                                                                                     |                                                                                                     |                                                                                                |                                                                                                         |                                                                                                        |                                                                                                        |                                                                                                        |
|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <br>39 kg | <br>360° | Max<br><br>60 kN | Max<br><br>25 kN | <br>1400 Nm | Max<br><br>25 l/min | Max<br><br>20 MPa | Max<br><br>20 MPa | Max<br><br>30 MPa |
|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact [rotator@indexator.com](mailto:rotator@indexator.com)