
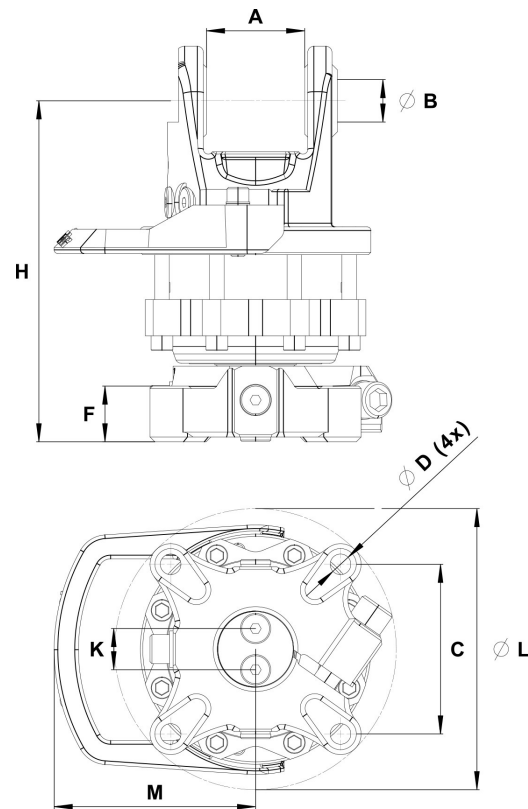


# GV 4E K

Part No.: 5002635

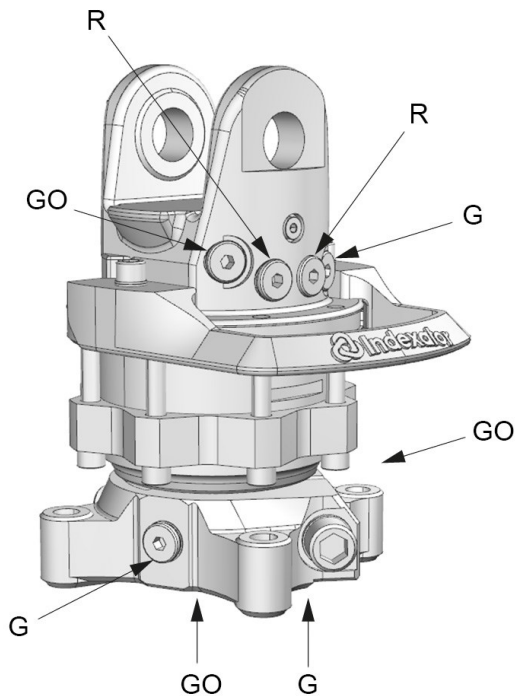

| Upper connection | Lower connection |
|------------------|------------------|
| G 3/8            | G 3/8            |

|               |              |               |              |             |              |             |               |              |
|---------------|--------------|---------------|--------------|-------------|--------------|-------------|---------------|--------------|
| A:<br>80,5 mm | B:<br>Ø35 mm | C:<br>140x140 | D:<br>Ø17 mm | F:<br>46 mm | H:<br>281 mm | K:<br>34 mm | L:<br>Ø232 mm | M:<br>166 mm |
|---------------|--------------|---------------|--------------|-------------|--------------|-------------|---------------|--------------|

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |  |  |
| 34.4 kg                                                                             | 360°                                                                                | 45 kN                                                                               | 25 kN                                                                               | 1150 Nm                                                                             | 12 l/min                                                                            | 25 MPa                                                                                | 30 MPa                                                                                | 30 MPa                                                                                |

K = 140×140 mm lower hole pattern.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact [rotator@indexator.com](mailto:rotator@indexator.com)